



ADS3GX4R5-E Macintosh Instructions

The ADS3GX4R5-E has been tested on a PowerMac G5 Dual 2.0 GHz model with PCI-X slots and as low as a PowerMac G4 400 model with PCI slots. Mac OS X 10.3.x or 10.4.x is required for the driver to work properly.

Hardware Install:


1. Turn the PowerMac G4 or G5 off and disconnect all cables.
2. Make sure that you are grounded to avoid static electricity.
3. Open the PowerMac G4 or G5.
4. Install the four port ADS3GX4R5-E in an open PCI or PCI-X slot.
5. Secure the bracket with a screw.
6. Close the PowerMac G4 or G5 and reconnect the cables.
7. Turn on the computer.

Software Driver Install:

1. Copy the SiI3124 0.42.4.pkg.zip to your hard drive.
2. Decompress the zip file by double clicking on it.
3. Launch the SiI3124 0.42.4.pkg.
4. Press continue and accept the license.
5. Select your startup drive as the install destination volume.
6. Push continue and the install button.
7. Type in your password to complete the installation.

Usage:

The SiI3124 0.42.4 Macintosh driver supplied with the ADS3GX4R5-E SATA host adapter is designed to provide SATA port multiplier compatibility on all four ports with an Apple PowerMac G4 or G5 running Mac OS X 10.3.x or 10.4.x. The driver is not designed for use with individual SATA hard drives in a direct connect configuration.

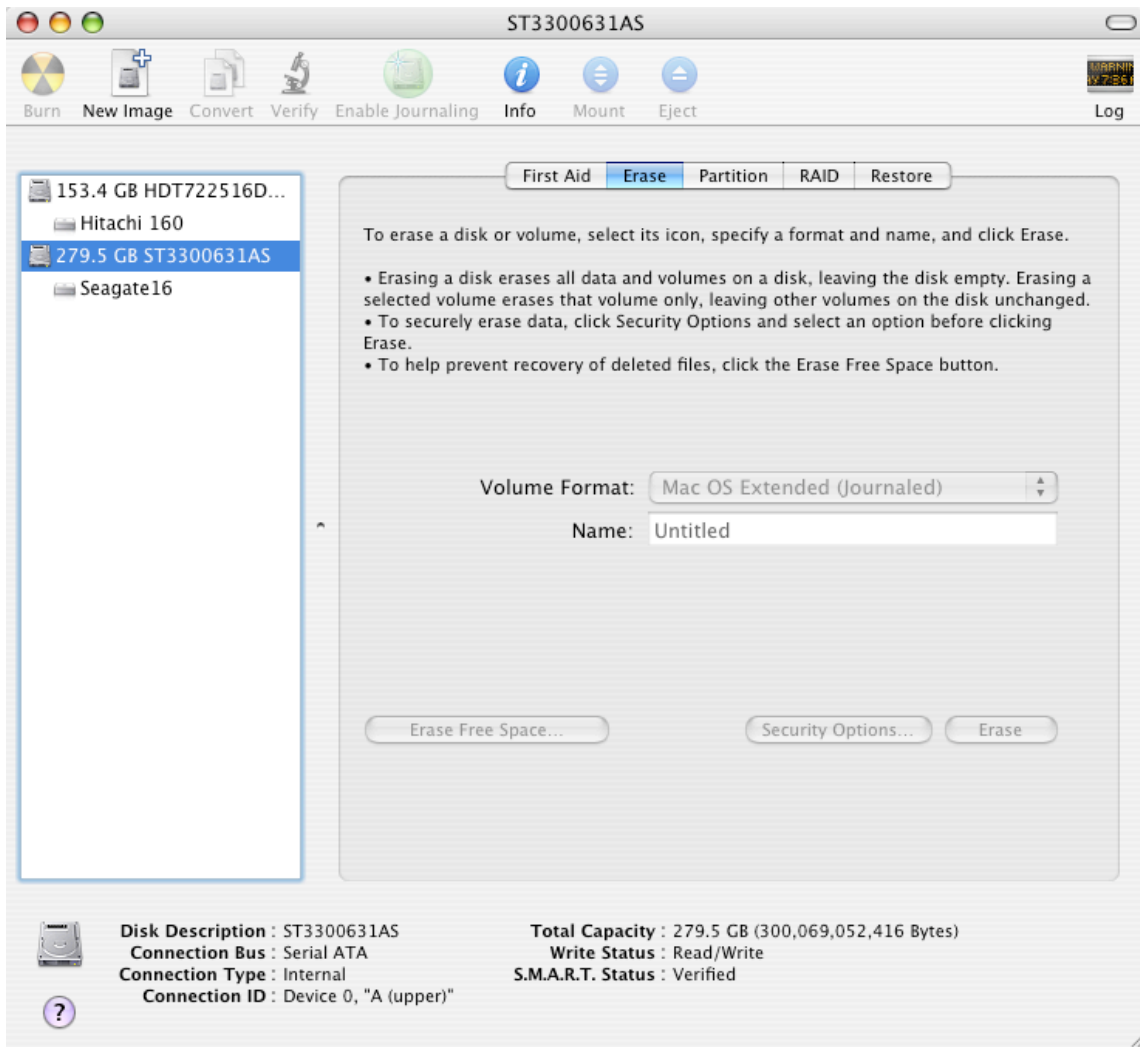

Setup

When you first purchase and install a new hard drive in the SATA PM enclosure attached to the ADS3GX4R5-E host adapter, you will need to format the hard drive using the erase tab in Disk Utility, Disk Utility can be found in

your “Utility” folder. Once you have erased the new hard drive it will mount on your desktop and be ready for use. You can also create RAIDs using Disk Utility with the hard drives mounted in your SATA PM enclosure.

The SiI3124 0.42.4 driver supports hot swap, deep sleep and provides up to four external ports on the ADS3GX4R5-E host adapter, that can be connected to as many as four SATA PM enclosures of five SATA hard drives each. Using this card with four enclosures Power Macintosh users can support up to 20 hard drives using a single ADS3GX4R5-E SATA host adapter.

Need Single Drive Support?

If you need to support single hard drives (direct connect) with the ADS3GX4R5-E host adapter it can be done using the Sil 3124 1.1.0 Macintosh drivers found here:

<http://www.siliconimage.com/support/supportsearchresults.aspx?pid=27&cid=3&ctid=2&osid=3&>

We have not included these drivers as they require a separate SATARAID5 setup procedure before any hard drives can be used on the Macintosh. Some users will find this interface less “Mac like” than when using the SiI3124 0.42.4 drivers that we have included. In addition, as no uninstall program is available for the Sil 3124 1.1.0 Macintosh drivers you may find it difficult to go back to the SiI3124 0.42.4 drivers.

Our suggestion is that you utilize the SiI3124 0.42.4 drivers in situations where you need SATA PM connections and use your other cards for individual hard drive connections. If this is not possible you may want to try the Sil 3124 1.1.0 Macintosh drivers. However, please understand that we cannot provide tech support for the Sil 3124 1.1.0 Macintosh drivers.